


AVIGILON™

12/24 8-Door Large Smart Hub

Expandable access control for the modern workplace

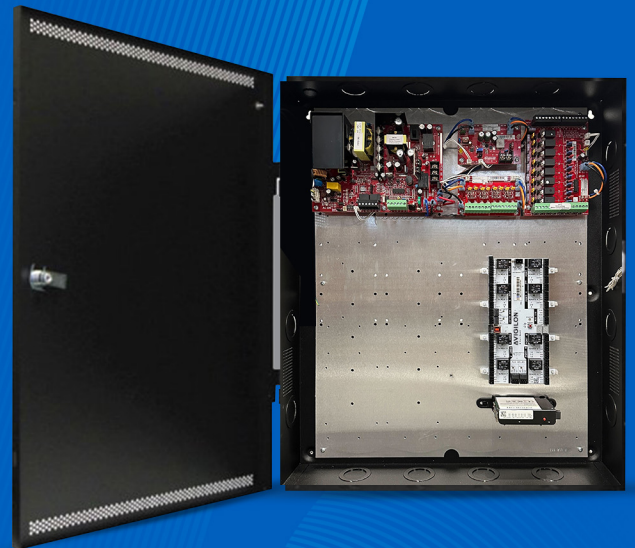

Smart Hubs are shipped unassembled.

Seamlessly expand your access control with our modular Core Series Smart Hub that features configurable inputs, encryption at every level and powerful, cloud-based management to enable secure, dynamic access control for any facility. The Smart Hub connects to expansion boards that include ports for 8 Avigilon Smart Readers, Request to Exit (REX) inputs, and Contact Sensors. It comes with a built-in 12/24VDC power supply, and connects to readers using industry standard RS-485 wiring for simplified installation.



Seamlessly expand and scale

This Smart Hub is designed to handle a single closet or single floor deployment with its 8-door configuration with integrated power for locking hardware.



Premium hardware for best performance

The Smart Hub features a future-proof Access Control Core that securely makes all entry decisions. It features a 12/24VDC large power supply and expansion boards. Take advantage of the larger enclosures for easy cable management.



Easy management with smart monitoring

Network and device monitoring systems built in to ensure a smooth experience for our users, with remote diagnostic and troubleshooting capabilities to resolve any issues with ease.



100% remote cloud management

Do more with less by securely and easily connecting to the cloud for remote system management, diagnostics, and communication.



Hassle-free installation


Aluminum backplate and plug-and-play design allows for easy expansion, customization and mounting, with interoperability to integrate with physical on-premise systems and logical software-based systems.



Lifetime limited warranty

Ensure peace of mind, knowing that Avigilon stands behind its access control hardware with a lifetime limited warranty, guaranteeing the quality of your security solution.

Specifications

SYSTEM	
Access Control	Up to 8 Avigilon Smart Readers
Door Relays	8 relays, 5A @ 24VDC (resistive)
Auxiliary Relays	4 relays, 1A @ 24VDC 4 auxiliary relays and 4 configurable auxiliary I/O pins provide extra inputs and outputs, and allow more sensors or Wiegand devices
Avigilon Readers	Up to 8 Avigilon Smart Readers Uses industry standard RS-485 signaling to communicate with Avigilon readers over standard wiring
Communication Ports	10/100/1000 baseT Ethernet; USB port
REX and Contact Sensors	8 REX and 8 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input
Auxiliary I/O	4 input/output lines with EOL monitoring
Power Supply	Up to 2A @ 12V and 3A @ 24V available for locking hardware
Backup Battery	Use two 12VDC sealed lead acid (SLA) or gel cell batteries in series (not included)
MECHANICAL	
Dimensions	 <p>*Use of mounting bracket is required for large-capacity Smart Hub models.</p>
Weight	Approx. 25 lbs (11.33 kg)
Power Supply	LifeSafety Power® E4 enclosure pre-installed with 24V FP0150 Power Supply, B100 Secondary Power Module, C8 Relay Based Lock Control Module, and D8P Power Distribution Module
Wiring	Uses RS-485 wiring to connect to the Avigilon Smart Readers EOL monitoring with single or double termination on all REX, Contact, and Auxiliary inputs supported with user-installed 1k resistors



ELECTRICAL

Input Voltage	120VAC, 208VAC, 230VAC 50/60Hz (user selectable AC input)
---------------	---

Input Current	2.5Amp max.
---------------	-------------

Operating Voltage	12VDC and 24VDC
-------------------	-----------------

Operating Current	1.8A @ 24VDC with 8 Avigilon Smart Readers 0.7 @ 24VDC with no Avigilon Smart Readers
-------------------	--

ENVIRONMENTAL

Operating Temperature	0°C to 50°C (32°F to 122°F)
-----------------------	-----------------------------

Operating Humidity	5% to 85% relative, non-condensing
--------------------	------------------------------------

REGULATORY

Certifications	CE (Europe), IC (Canada), FCC (United States), NOM (Mexico), RoHS, UKCA (United Kingdom), UL 294*, CAN/ULC 60839-11-1 *Performance Levels: Attack Level I, Endurance Level I, Line Security Level I, Standby Power Level I
----------------	---

WARRANTY

Avigilon Alta Access Warranty	Lifetime limited; for more information, visit avigilon.com/support/warranty
-------------------------------	---



Ordering Information

PART NUMBER	DESCRIPTION
SYS-8ENT-DVE4	Avigilon 12/24 8-Door Large Smart Hub - E4 Enclosure Shipped separately: Avigilon Access Control Core (OP-CR-ACC), Avigilon 8-Port Board (OP-EX-8E)

Support

For product support, visit: [avigilon.com](https://www.avigilon.com) or sales@avigilon.com

For more information, visit:

[avigilon.com/access-control/12-24v-8-door-core-series-large-smart-hub](https://www.avigilon.com/access-control/12-24v-8-door-core-series-large-smart-hub)



Motorola Solutions, Inc. 500 West Monroe Street, Chicago, IL 60661 U.S.A. [motorolasolutions.com](https://www.motorolasolutions.com)

© 2024, Avigilon Corporation. All rights reserved. MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.

20240719-en